


## Knowledge Base

### Device not recognized after driver installation under macOS

original release: 2018-09-11 | ID: KB00265EN




Due to the security features of macOS 10.13 (High Sierra) and higher, it is important to check the content of this article to make sure that the driver for our U86 XT, U168 XT or U108 PRE are properly loaded and the device gets detected. During installation, you will typically receive the following message:

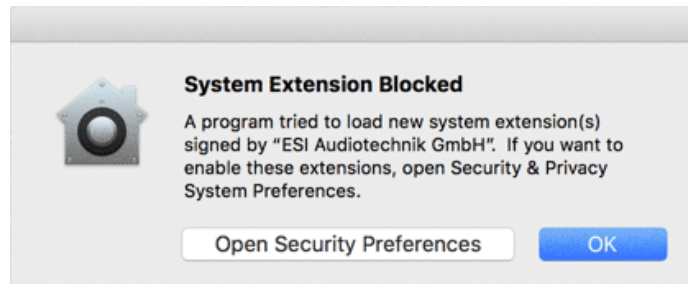

A new security feature in macOS prevents the loading of so-called "System Extensions" like our driver for these USB audio interfaces. This message might not be displayed again, especially if you reboot your system.

To make sure the driver is actually loading, click on *Open Security Preferences* in this dialog or go to your *System Preferences* and select the *Security & Privacy > General* panel there:

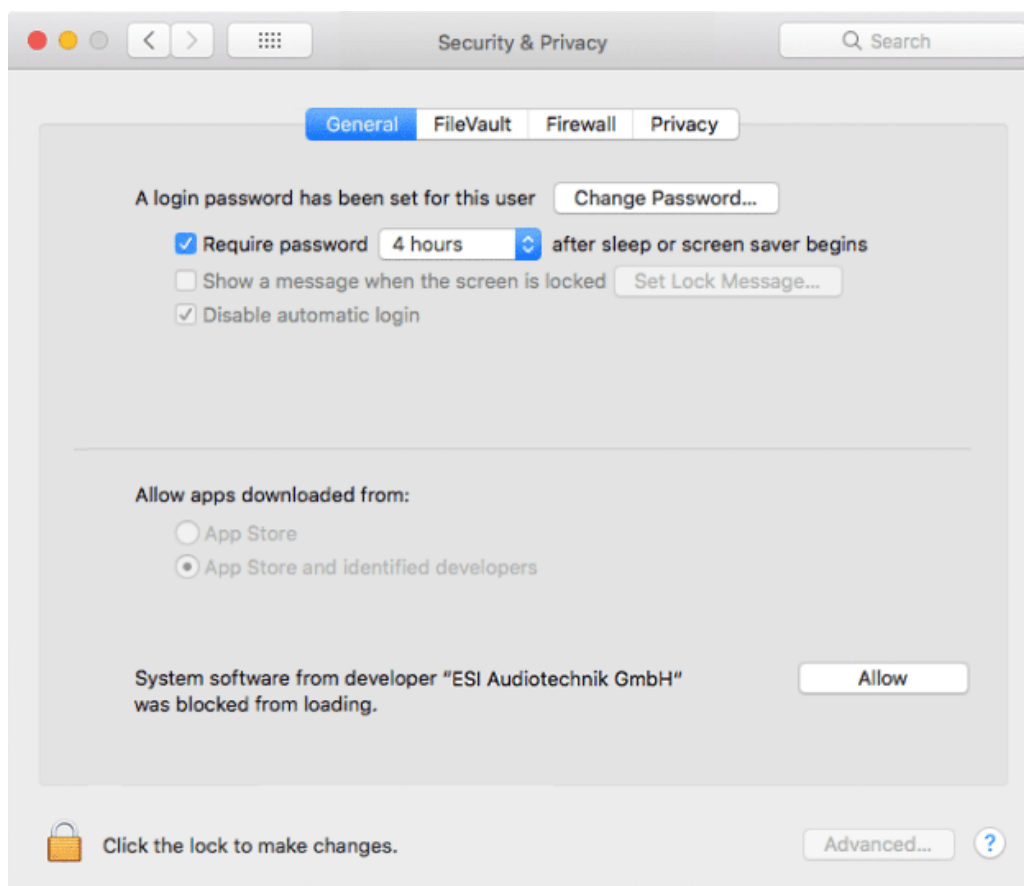

Make sure to click the *Allow* button next to the notification about our driver there.

If this button is not displayed (it might disappear after a while, especially if you install different system extensions after each other), then uninstall the driver again (which requires a reboot), then install it again and go back to this dialog in the *System Preferences* before you reboot your system then.